GE
Lighting Solutions

Decorative Post Top Lighting

StreetDreams™ Madison (MADX & MADF)

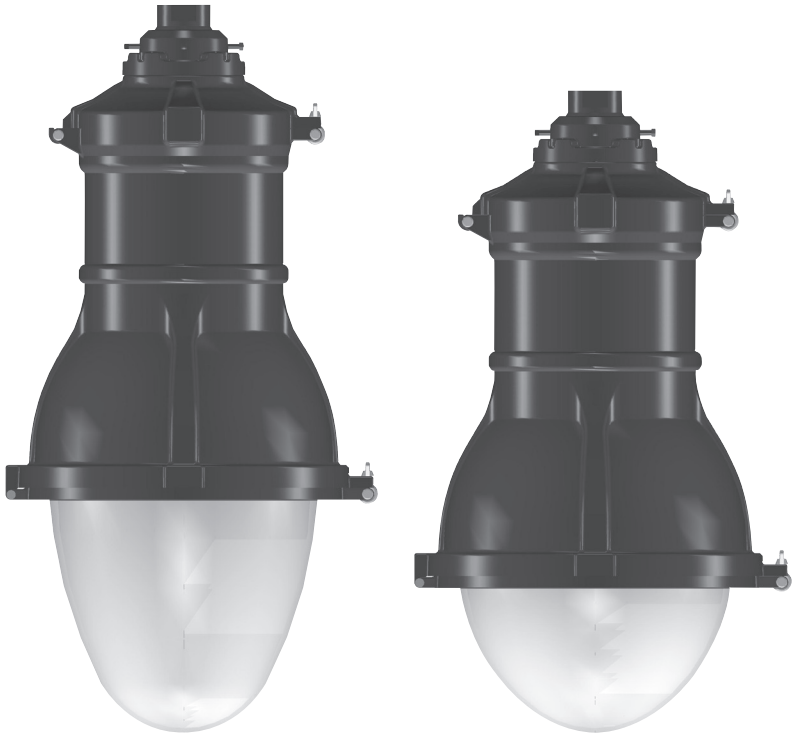

imagination at work

Product Features

GE offers a variety of decorative Post Top and Pendant Mount Lighting solutions that range from the nostalgic looks of yesterday to the sleek, modern designs of today, providing style and elegance to downtown areas, commercial developments, parks and residential communities.

Applications

- Residential roadway, walkways, historic urban settings, shopping centers, malls, plazas and parks

Finish

- Powder painted with choice of 188 colors

Ratings

- /c 1598 Listed

Mounting

- Several Mounting Options

Unique Features

- Tool-less access to lamp, ignitor and ballast
- Multiple finial choices
- Textured, prismatic glass offered in two sizes
- Medium and mogul base sockets available
- Full size PE available
- Terminal board standard
- Shielding available
- Flex adapter allows ±10° vertical leveling, 360° horizontal rotation
- Channeling to prevent water ingress

Accessories

Fixture Dimensions - All shown with Flex Mount



MADISON SHALLOW SKIRT



MADISON SHALLOW SKIRT WITH SF



MADISON DEEP SKIRT



MADISON DEEP SKIRT WITH SF



MADISON 30 IN.
DECORATIVE SKIRT



MADISON 30 IN.
DECORATIVE SKIRT WITH SF



MADISON 36 IN.
DECORATIVE SKIRT



MADISON 36 IN.
DECORATIVE SKIRT WITH SF

MADISON SHALLOW SKIRT
ELS-PS-BLCK

MADISON DEEP SKIRT
ELS-PD-BLCK

MADISON 30 IN. DECO SKIRT
ELS-DECO 30-BLCK

MADISON 36 IN. DECO SKIRT
ELS-DECO 36-BLCK

Ordering Number Logic

StreetDreams™ Madison (MADX & MADF)

_ _ _ _ - _ - _ - __ - _ - _ - _ - _ - _ - _ - _ - _ - _ - __ - _

No Finial, PE Optional

PROD. ID	GLOBE	DISTRIBUTION	WATTAGE	LIGHT SOURCE	VOLTAGE	BALLAST TYPE	MOUNTING	PE FUNCTION	FINIAL	SHIELDING	COLOR	OPTIONS
MADX = Madison/ No Finial/ PE on arm only **MADF** = Madison/ Arm mount only/ No PE **MADI** = Madison with internal PE receptacle	**G** = Shallow Globe **L** = Long Glass **S** = Short Glass	**A** = Asymmetric **B** = Symmetric	**05** = 50 **07** = 70 **10** = 100 **15** = 150 **25** = 250 **40** = 400	**E** = Energy Act Compliant Pulse MH (EPMH) **S** = HPS **P** = PMH	**0** = Multi **1** = 120 **2** = 280 **3** = 240 **4** = 277 **5** = 480 **C** = 120x 240x 277 **D** = 347 **F** = 120X 347	**A** = Autoreg **H** = HPF REAC. or LAG **N** = NPF REAC. or LAG	**1** = 1.5" Rigid * Mount **2** = 1.5" Flex ** Mount **3** = Arm + Flex ** Mount (No PE) Finial Available **4** = Arm + Rigid*** Mount (No PE) Finial Available **5** = Arm + Rigid * Mount No Finial **6** = Arm + Flex * Mount No Finial PE available with arm mounting only	**1** = None **2** = External PE * receptacle **4** = External PE * receptacle with Shorting Cap **5** = External PE * receptacle with PE Control **6** = Internal PE *** receptacle **7** = Internal PE *** receptacle with Shorting Cap **8** = Internal PE *** receptacle with PE Control PE available with arm mounting only	**X** = None **A** = Silhouette ** **B** = Acorn **C** = Fleur-De-Lis **D** = Filagree **E** = Blossom **F** = Spike **H** = Steeple **J** = Gothic	**0** = None **2** = Shallow Skirt **3** = Deep Skirt **4** = 30" Decorative Skirt **5** = 36" Decorative Skirt	**AL** = Aluminum **BL** = Black **CG** = Charcoal Gray **DB** = Dark Bronze **GR** = Gray **FG** = Forest Green **XX** = Special	**F** = Fused

NOTES:
* Available with MADX only
** Available with MADF only
*** Available with MADI only

Ballast Selection Table

Wattage	Light Source	Ballast Type/ Voltage 60 Hz				
		120X208X 240X277	120X240X 277	120	480	347 120 x 347
50	HPS	H,N	N/A	H,N	N/A	H,N
70	HPS	H,N,A	N/A	H,N,A	H,N	H,N
100	HPS	H,N,A	N/A	H,N,A	H,N	H,N
150 (55v)	HPS	H,N,A	N/A	H,N,A	H,N	H,N
250	HPS	A	N/A	A	A	A
400	HPS	A	N/A	A	A	A
70	PMH	H,N	N/A	H,N	H,N	N/A
100	PMH	H,N	N/A	H,N	H,N	H,N
150	PMH	N/A	H	H,A	N/A	H
250	EPMH	A	N/A	A	A	N/A
400	EPMH	A	N/A	A	A	N/A

Photometric Selection Table

Wattage	Light Source	Symmetric Long	Symmetric Short	Asymmetric Long	Asymmetric Short
50	HPS	453320	453337	453356	453368
70	HPS	453321	453332	453357	453369
100	HPS	453322	453333	453358	453370
150 (55v)	HPS	453323	453334	453359	453371
250	HPS	453324	453335	453360	453372
400	HPS	453325	453336	453361	453373
70	PMH	453326	453338	453362	453374
100	PMH	453327	453339	453363	453375
250	EPMH	453330	453342	453366	453378
400	EPMH	453331	453343	453367	453379

Bracket dimensions and decorative finials

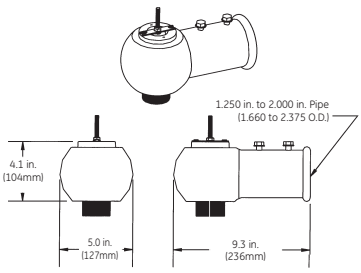

ARM, FINIAL READY

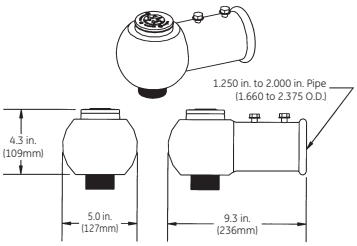

ARM, WITH PE RECEPTACLE



ARM, NO FINIAL OR PE



FLEX ADAPTER

SILHOUETTE

ACORN

FLEUR-DE-LIS

FILAGREE

BLOSSOM

SPIKE

STEEPLE

GOTHIC

Product Dimensions

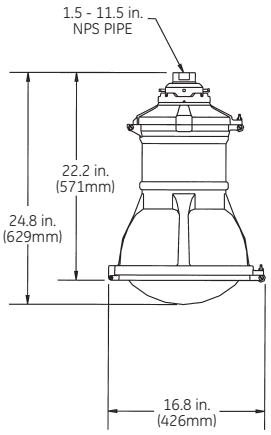

MADISON
SHALLOW GLASS

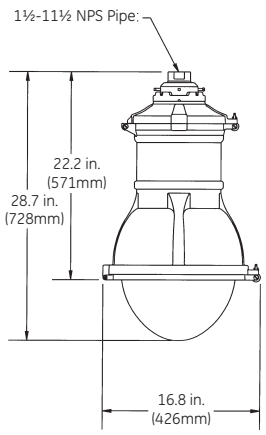

MADISON WITH
SHORT GLASS

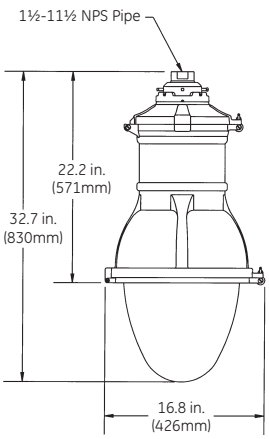

MADISON WITH
LONG GLASS

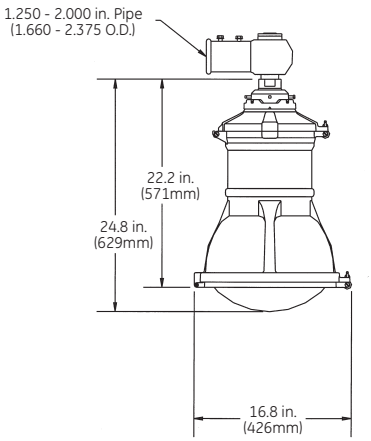

MADISON WITH ARM
AND SHALLOW GLASS

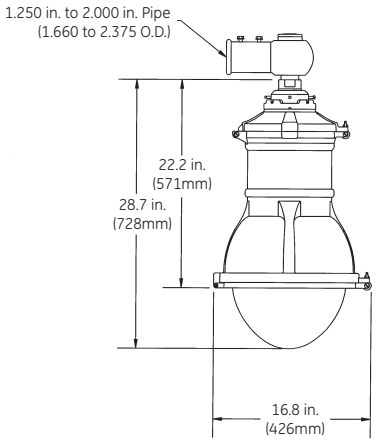

MADISON WITH ARM
AND SHORT GLASS

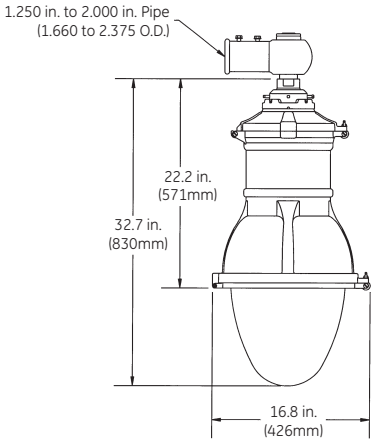

MADISON WITH ARM
AND LONG GLASS

DATA

- Approximate Net Weight: Short - 59 lbs (26.8 kgs)
  Long - 63 lbs (28.6 kgs)
- Suggested Mounting Height: 12-40 ft. (4-12 M)
- Effective Projected Area: Short - 1.0 sq ft max (.09 sq M max)
  Long - 1.2 sq ft max (.11 sq M max)

GE Lighting Solutions • 1-888-MY-GE-LED • www.gelightingsolutions.com
1-888-69-43-533

GE Lighting Solutions, LLC is a subsidiary of the General Electric Company. The GE brand and logo are trademarks of the General Electric Company.
© 2012 GE Lighting Solutions, LLC. Information provided is subject to change without notice. All values are design or typical values when measured under laboratory conditions.